


SPECIFICATIONS AND PARTS LIST

ALLEN PORTABLE MIXERS

Manufactured By

ALLEN-JAC CORP.

1190 North 13th Street • San Jose 12, California

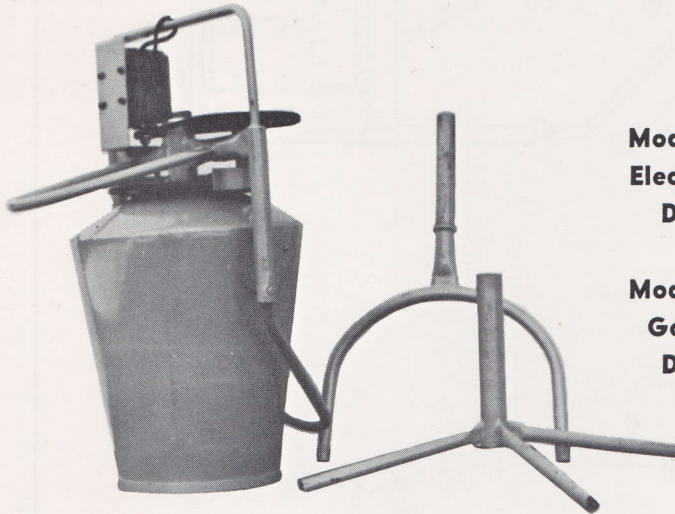

MIXER KNOCKED DOWN

Model 9500
Electrically
Driven

Model 9507
Gasoline
Driven










MIXER SET UP

SPECIFICATIONS

1. Mixer can be knocked down in 3 pieces for easy transporting or storage.
2. No tools or bolts used to set up or dismantle (simply slips apart).
3. Fits in trunk of car or station wagon—goes through average door.
4. Power — $\frac{1}{4}$ HP, 115 V, 60 cycle Electric Motor or Gasoline Engine.
5. Drive — V belt to steel gears for noiseless operation, power.
6. Construction — All Steel — (no cast iron) — Drum welded water tight.
7. Drum — Revolves on Timken Bearings — Tilts from any position.
8. This machine is ideal for tumbling small parts.
9. Mixes — Concrete, Stucco, Plaster, Liquids, Mortar, Feed, etc.
10. Capacity — Wheelbarrow Load — 3 Cubic Feet.

11. Shipping weight:	Height	57"
Electric Mixer 150 Lbs.	Wide	30"
Gasoline Mixer 162 Lbs.	Long	40"

— SEE YOUR DEALER OR FACTORY FOR PRICES —

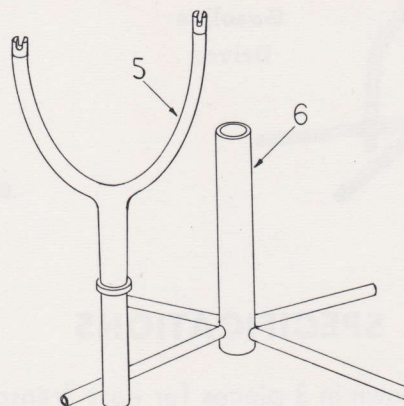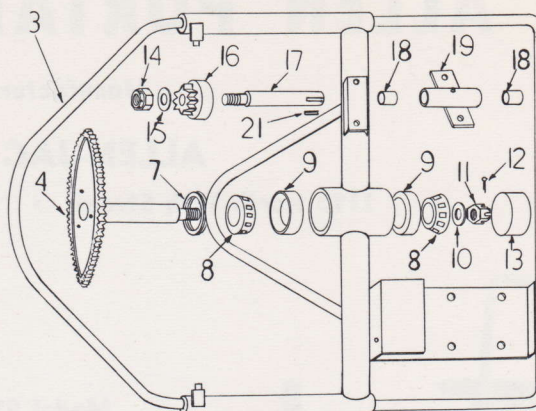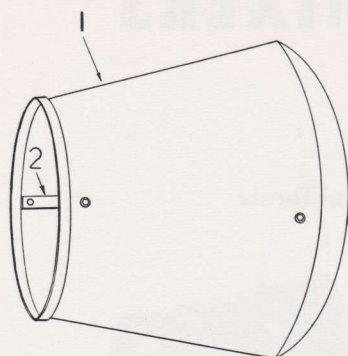

WHEN ORDERING REPAIR PARTS, ALWAYS GIVE THE FOLLOWING INFORMATION:

1. THE PART NUMBER
2. THE PART NAME
3. THE MODEL NUMBER
4. THE NAME OF ITEM

PARTS LIST		
REF NO.	PART NO.	DESCRIPTION
1	106A	BARREL 3 CU. FT.
2	603A	MIXER ARMS
3	212A	FRAME (FOR ELECTRIC MOTOR)
3	212B	FRAME (FOR GASOLINE ENGINE)
4	304A	MAIN SHAFT AND GEAR
5	405A	YOKE
6	505A	STAND
7	2325A	DUST SEAL
8	2401A	TIMKEN BEARING (SPECIFY NO.ON CONE)
9	2501A	TIMKEN BEARING (SPECIFY NO.ON CUP)
10	2601A	3/4" WROUGHT WASHER
11	2701A	3/4" SLOTTED HEX NUT USS
12	2801A	COTTER KEY
13	3001A	GREASE CAP
14	1501A	5/8" SELF LOCKING NUT SAE
15	1601A	5/8" SHAKEPROOF WASHER

PARTS LIST		
REF NO.	PART NO.	DESCRIPTION
16	1701A	9 TOOTH GEAR
17	2001A	SPINDLE SHAFT
18	1801A	BRONZE BUSHING
19	1822A	SPINDLE HOUSING WITH BUSHING
20	1201A	GEAR GUARD
21	2101A	3/16" KEY STOCK
22	6335B	6 1/2" SHEAVE
23	801B	V BELT (45")
24	6228B	3 3/4" SHEAVE
25	3801B	GASOLINE ENGINE
26	901A	10" SHEAVE
27	801A	V BELT (50")
28	701A	2" SHEAVE
29	1101A	1/4 HP 115V ELEC.MOTOR
30	1301A	CORD AND PLUG

INSTRUCTIONS

1. GREASE ALEMITE FITTINGS ONCE A WEEK.
2. BARREL SHAFT BEARINGS PACKED AT FACTORY.
3. USE HEAVY EXTENSION CORD---14 WIRE MINIMUM
4. DO NOT ADJUST V BELT TOO TIGHT. IF BELT DOES NOT SLIP, IT IS ADJUSTED CORRECTLY.

START MIXER BEFORE LOADING

AS FOLLOWS	AVERAGE MIX
1st. WATER-----	2 GALLONS
2nd. CEMENT-----	3 SHOVELS
3rd. AGGREGATE-----	15 SHOVELS